


Electric Parts - Control Panel  
NCP Series



| End Carriage Control Panel |                               |               |                          |
|----------------------------|-------------------------------|---------------|--------------------------|
| IP Class                   | IP55                          | Contact Brand | Schneider                |
| Working Temperature        | -30°C to +70°C                | Relay Brand   | Schneider                |
| Material of Control Box    | Cold Steel or Stainless Steel | MCB Brand     | Schneider                |
| Color of Box               | Gray or Black                 | Main Power    | 220V,380V,415V,440V,460V |
| Inverter Capacity          | 0.75kW to 30kW                | Hertz         | 50Hz or 60Hz             |
| Inverter Brand             | YASKAWA, SCHNEIDER, DELTA     | Control Power | 24V,36V,48V,110V,220V    |

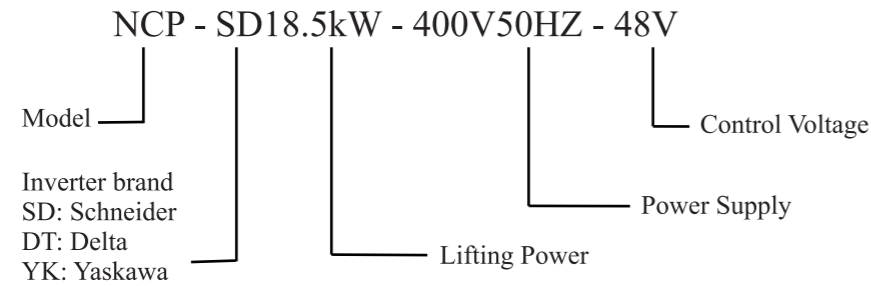

Schneider ATV340



Schneider ATV320




Yaskawa A1000/V1000



Delta VFD

Electric Parts - Socket  
HE / HSB / HK Series

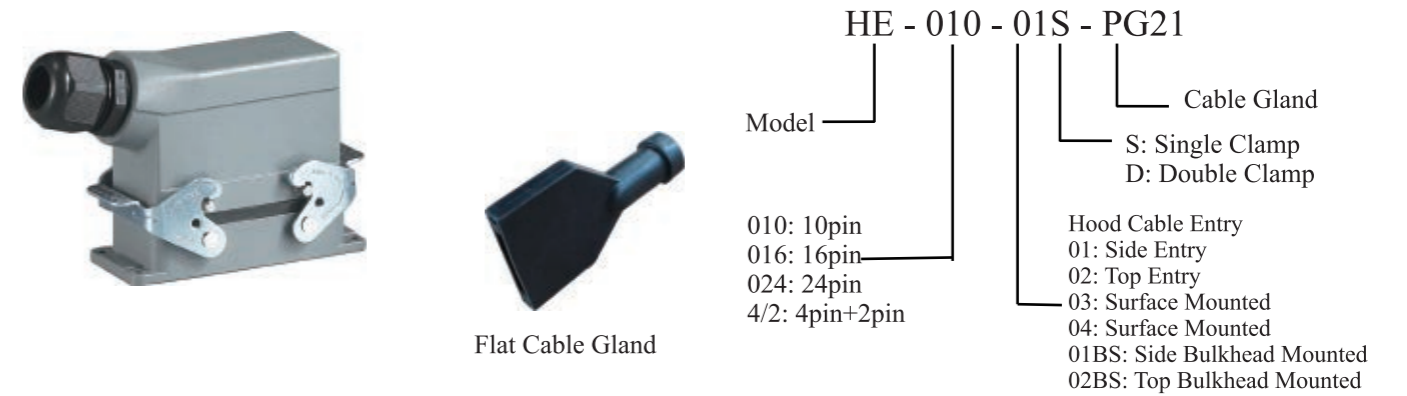

| Plug and Stock Feature |                           |                         |                         |
|------------------------|---------------------------|-------------------------|-------------------------|
| Rated Voltage          | 400V                      | 500V                    | 690V                    |
| Rated Current          | 16A                       | 35A                     | 80A                     |
| Pin Number             |                           |                         |                         |
| 4Pin                   |                           | HSB-04                  |                         |
| 6Pin                   |                           |                         | HK4/2                   |
| 10Pin                  | HE-10                     |                         |                         |
| 16Pin                  | HE-16                     |                         |                         |
| 24Pin                  | HE-24                     |                         |                         |
| Max.Wire Gauge         | 4.0mm <sup>2</sup> /12AWG | 6mm <sup>2</sup> /10AWG | 16mm <sup>2</sup> /5AWG |
| Stripping Length       | 7.5mm                     | 11.5mm                  | 14.0mm                  |
| Flame Rating           | V0 ( Acc.to UL94 )        |                         |                         |
| Protection Class       | IP65                      |                         |                         |
| Cable Gland            | M20, M25, PG16, PG21      |                         |                         |

| Instucture           |         |         |         |                |
|----------------------|---------|---------|---------|----------------|
| 1- Hood Cable Entry  |         |         |         | Screw Terminal |
| Side                 | Top     | TSB     | TGB     |                |
|                      |         |         |         |                |
| 2- Housing           |         |         |         |                |
| Short                | Hight   | Cap     |         |                |
|                      |         |         |         |                |
| 3- Male & Female Pin |         |         |         |                |
| HE-10-M              | HE-16-M | HE-24-M | HSB-6-M | HK-4/2+M       |
|                      |         |         |         |                |
| HE-10-F              | HE-16-F | HE-24-F | HSB-6-F | HK-4/2+F       |
|                      |         |         |         |                |